


Engenharias:

da genialidade à profissão e
seu desenvolvimento

2

Henrique Ajuz Holzmann
João Dallamuta
(Organizadores)

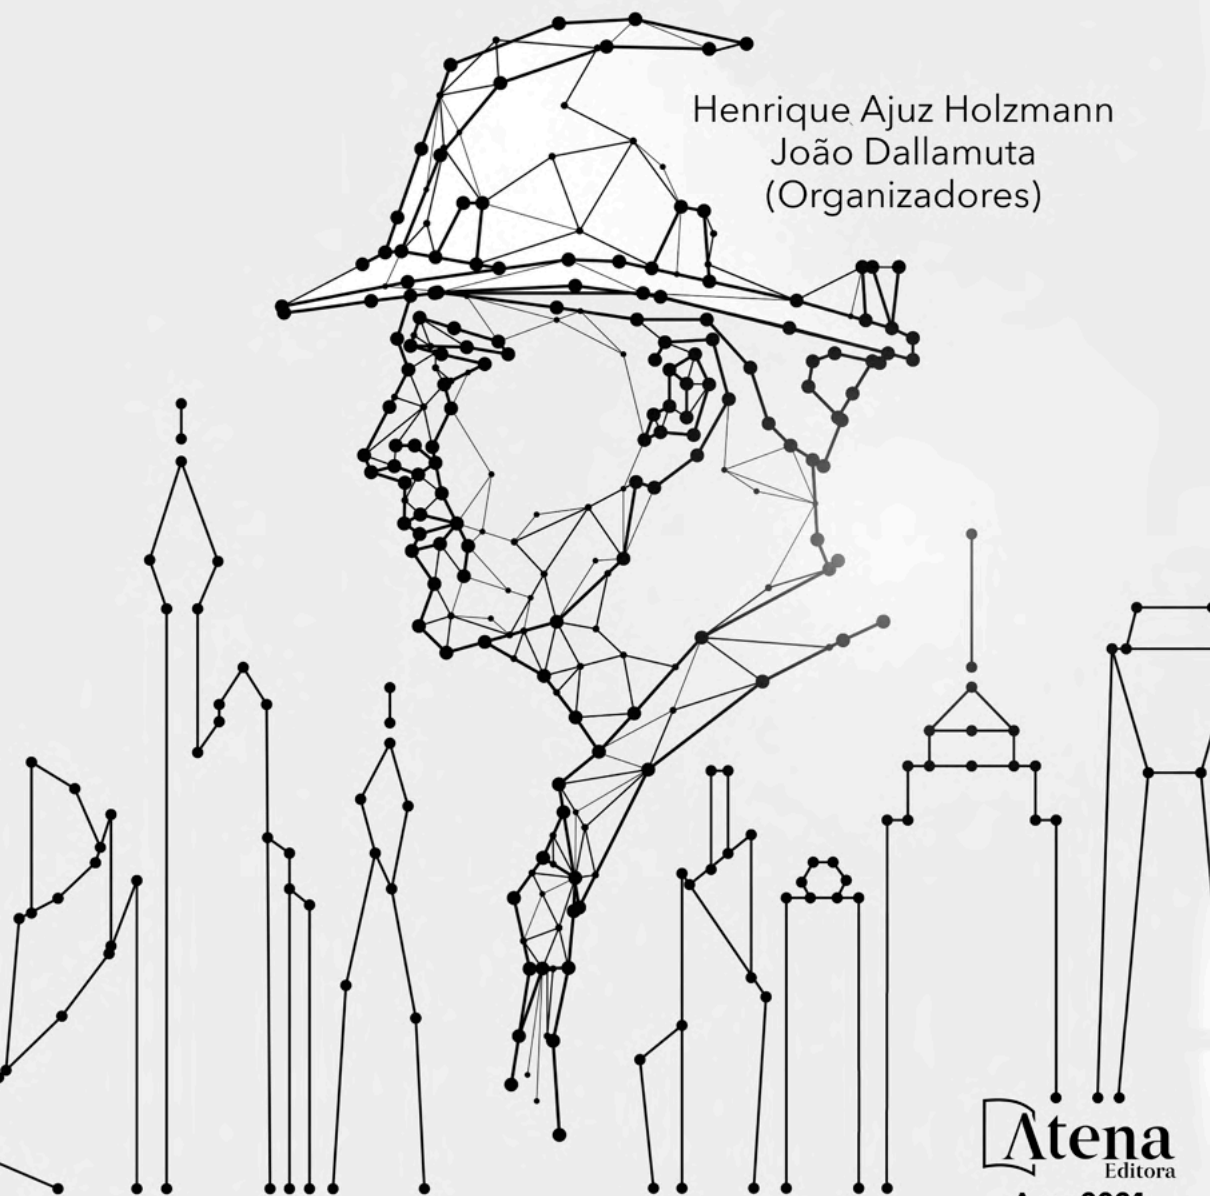

Editora chefe

Profª Drª Antonella Carvalho de Oliveira

Editora executiva

Natalia Oliveira

Assistente editorial

Flávia Roberta Barão

Bibliotecária

Janaina Ramos

Projeto gráfico

Camila Alves de Cremo

Daphynny Pamplona

Luiza Alves Batista

Maria Alice Pinheiro

Natália Sandrini de Azevedo

Imagens da capa

iStock

Edição de arte

Luiza Alves Batista

2021 by Atena Editora

Copyright © Atena Editora

Copyright do texto © 2021 Os autores

Copyright da edição © 2021 Atena Editora

Direitos para esta edição cedidos à Atena Editora pelos autores.

Open access publication by Atena Editora



Todo o conteúdo deste livro está licenciado sob uma Licença de Atribuição *Creative Commons*. Atribuição-Não-Comercial-NãoDerivativos 4.0 Internacional (CC BY-NC-ND 4.0).

O conteúdo dos artigos e seus dados em sua forma, correção e confiabilidade são de responsabilidade exclusiva dos autores, inclusive não representam necessariamente a posição oficial da Atena Editora. Permitido o *download* da obra e o compartilhamento desde que sejam atribuídos créditos aos autores, mas sem a possibilidade de alterá-la de nenhuma forma ou utilizá-la para fins comerciais.

Todos os manuscritos foram previamente submetidos à avaliação cega pelos pares, membros do Conselho Editorial desta Editora, tendo sido aprovados para a publicação com base em critérios de neutralidade e imparcialidade acadêmica.

A Atena Editora é comprometida em garantir a integridade editorial em todas as etapas do processo de publicação, evitando plágio, dados ou resultados fraudulentos e impedindo que interesses financeiros comprometam os padrões éticos da publicação. Situações suspeitas de má conduta científica serão investigadas sob o mais alto padrão de rigor acadêmico e ético.

Conselho Editorial**Ciências Exatas e da Terra e Engenharias**

Prof. Dr. Adélio Alcino Sampaio Castro Machado – Universidade do Porto

Profª Drª Ana Grasielle Dionísio Corrêa – Universidade Presbiteriana Mackenzie

Prof. Dr. Carlos Eduardo Sanches de Andrade – Universidade Federal de Goiás

Profª Drª Carmen Lúcia Voigt – Universidade Norte do Paraná

Prof. Dr. Cleiseano Emanuel da Silva Paniagua – Instituto Federal de Educação, Ciência e Tecnologia de Goiás

Prof. Dr. Douglas Gonçalves da Silva – Universidade Estadual do Sudoeste da Bahia
Prof. Dr. Eloi Rufato Junior – Universidade Tecnológica Federal do Paraná
Profª Drª Érica de Melo Azevedo – Instituto Federal do Rio de Janeiro
Prof. Dr. Fabrício Menezes Ramos – Instituto Federal do Pará
Profª Dra. Jéssica Verger Nardeli – Universidade Estadual Paulista Júlio de Mesquita Filho
Prof. Dr. Juliano Carlo Rufino de Freitas – Universidade Federal de Campina Grande
Profª Drª Luciana do Nascimento Mendes – Instituto Federal de Educação, Ciência e Tecnologia do Rio Grande do Norte
Prof. Dr. Marcelo Marques – Universidade Estadual de Maringá
Prof. Dr. Marco Aurélio Kistemann Junior – Universidade Federal de Juiz de Fora
Profª Drª Neiva Maria de Almeida – Universidade Federal da Paraíba
Profª Drª Natiéli Piovesan – Instituto Federal do Rio Grande do Norte
Profª Drª Priscila Tessmer Scaglioni – Universidade Federal de Pelotas
Prof. Dr. Sidney Gonçalo de Lima – Universidade Federal do Piauí
Prof. Dr. Takeshy Tachizawa – Faculdade de Campo Limpo Paulista

Engenharias: da genialidade à profissão e seu desenvolvimento 2

Diagramação: Camila Alves de Cremona
Correção: Bruno Oliveira
Indexação: Amanda Kelly da Costa Veiga
Revisão: Os autores
Organizadores: Henrique Ajuz Holzmann
 João Dallamuta

Dados Internacionais de Catalogação na Publicação (CIP)	
E57	Engenharias: da genialidade à profissão e seu desenvolvimento 2 / Organizadores Henrique Ajuz Holzmann, João Dallamuta. – Ponta Grossa - PR: Atena, 2020. Formato: PDF Requisitos de sistema: Adobe Acrobat Reader Modo de acesso: World Wide Web Inclui bibliografia ISBN 978-65-5983-624-6 DOI: https://doi.org/10.22533/at.ed.246211811 1. Engenharia. I. Holzmann, Henrique Ajuz (Organizador). II. Dallamuta, João (Organizador). III. Título. CDD 620
Elaborado por Bibliotecária Janaina Ramos – CRB-8/9166	

Atena Editora
 Ponta Grossa – Paraná – Brasil
 Telefone: +55 (42) 3323-5493
www.atenaeditora.com.br
contato@atenaeditora.com.br

DECLARAÇÃO DOS AUTORES

Os autores desta obra: 1. Atestam não possuir qualquer interesse comercial que constitua um conflito de interesses em relação ao artigo científico publicado; 2. Declaram que participaram ativamente da construção dos respectivos manuscritos, preferencialmente na: a) Concepção do estudo, e/ou aquisição de dados, e/ou análise e interpretação de dados; b) Elaboração do artigo ou revisão com vistas a tornar o material intelectualmente relevante; c) Aprovação final do manuscrito para submissão.; 3. Certificam que os artigos científicos publicados estão completamente isentos de dados e/ou resultados fraudulentos; 4. Confirmam a citação e a referência correta de todos os dados e de interpretações de dados de outras pesquisas; 5. Reconhecem terem informado todas as fontes de financiamento recebidas para a consecução da pesquisa; 6. Autorizam a edição da obra, que incluem os registros de ficha catalográfica, ISBN, DOI e demais indexadores, projeto visual e criação de capa, diagramação de miolo, assim como lançamento e divulgação da mesma conforme critérios da Atena Editora.

DECLARAÇÃO DA EDITORA

A Atena Editora declara, para os devidos fins de direito, que: 1. A presente publicação constitui apenas transferência temporária dos direitos autorais, direito sobre a publicação, inclusive não constitui responsabilidade solidária na criação dos manuscritos publicados, nos termos previstos na Lei sobre direitos autorais (Lei 9610/98), no art. 184 do Código Penal e no art. 927 do Código Civil; 2. Autoriza e incentiva os autores a assinarem contratos com repositórios institucionais, com fins exclusivos de divulgação da obra, desde que com o devido reconhecimento de autoria e edição e sem qualquer finalidade comercial; 3. Todos os e-book são *open access*, desta forma não os comercializa em seu site, sites parceiros, plataformas de *e-commerce*, ou qualquer outro meio virtual ou físico, portanto, está isenta de repasses de direitos autorais aos autores; 4. Todos os membros do conselho editorial são doutores e vinculados a instituições de ensino superior públicas, conforme recomendação da CAPES para obtenção do Qualis livro; 5. Não cede, comercializa ou autoriza a utilização dos nomes e e-mails dos autores, bem como nenhum outro dado dos mesmos, para qualquer finalidade que não o escopo da divulgação desta obra.

CHARACTERISTICS OF Pb^{2+} DOPED Csl MATRIX UNDER GAMMA AND NEUTRON EXCITATIONS

Data de aceite: 01/11/2021

Data de submissão: 08/10/2021

Maria da Conceição Costa Pereira

Instituto de Pesquisas Energéticas e Nucleares
(IPEN / CNEN - SP)
São Paulo, SP – Brazil
<http://lattes.cnpq.br/0977986453736808>

Tufic Madi Filho

Instituto de Pesquisas Energéticas e Nucleares
(IPEN / CNEN - SP)
São Paulo, SP – Brazil
Universidade Paulista – UNIP
Campus Tatuapé
São Paulo - Brazil
<http://lattes.cnpq.br/3251192790149021>

José Roberto Berretta

Instituto de Pesquisas Energéticas e Nucleares
(IPEN / CNEN - SP)
São Paulo, SP – Brazil
<http://lattes.cnpq.br/4444753560161862>

Lucas Faustino Tomaz

Instituto de Pesquisas Energéticas e Nucleares
(IPEN / CNEN - SP)
São Paulo, SP – Brazil
<http://lattes.cnpq.br/1901511133573103>

ABSTRACT: In recent years, there has been an increasing interest in finding new fast scintillating material or improve the characteristics of known scintillators for the demand of high energy physics, industrial and nuclear medical applications. Divalent lead ions Pb^{2+} built in some crystal

structures are efficient emission centers and their applications in scintillators were and are still the reason of an intensive study of emission properties of different compounds containing these ions. In this context, the crystals of Pb^{2+} doped Csl matrix were grown by the vertical Bridgman technique and subjected to annealing in vacuum of 10^{-6} mbar and constant temperature of $350^{\circ}C$, for 24 hours, and then they were employed. To evaluate the response of the Csl:Pb scintillator crystal to gamma radiation, radioactive sources of ^{137}Cs (662 keV), ^{60}Co (1173 keV and 1333 keV), ^{22}Na (511 keV and 1275 keV) and ^{133}Ba (355 keV) were used. The operating voltage of the photomultiplier was 2700 V for the detection of gamma rays and the accumulation time in the counting process was 600 s. The scintillator response to neutron radiation from a radioactive source of AmBe with energy range of 1 to 12 MeV was available. The activity of the AmBe source was 1 Ci Am. The emission rate was 2.2×10^6 neutrons/ second. The operating voltage of the photomultiplier tube was 1300 V. The accumulation time in the counting process was 600 s. With the results obtained, it may be observed that the crystals are sensitive to these radiations.

KEYWORDS: Scintillator, crystal growth, gamma radiation, neutron radiation.

CARACTERÍSTICAS DA MATRIZ Csl DOPADA COM Pb^{2+} SOB EXCITAÇÕES GAMA E NÊUTRONS

RESUMO: Nos últimos anos, tem havido um interesse crescente em encontrar novos

materiais de cintilação rápida ou melhorar as características de cintiladores conhecidos para atender a demanda de física de alta energia, aplicações médicas, industriais e nucleares. Os íons divalentes de chumbo Pb^{2+} inseridos em algumas estruturas cristalinas são centros emissores eficientes e suas aplicações em cintiladores foram e ainda são motivo de um estudo intensivo das propriedades de emissão de diferentes compostos contendo esses íons. Nesse contexto, os cristais de matriz CsI dopada com Pb^{2+} foram crescidos pela técnica de Bridgman vertical e submetidos ao tratamento térmico a vácuo de 10^{-6} mbar e temperatura constante de $350^{\circ}C$, por 24 horas. Para avaliar a resposta do cristal cintilador CsI:Pb à radiação gama, foram utilizadas fontes radioativas de ^{137}Cs (662 keV), ^{60}Co (1173 keV e 1333 keV), ^{22}Na (511 keV e 1275 keV) e ^{133}Ba (355 keV). A tensão de operação do tubo fotomultiplicador foi de 2700 V para a detecção dos raios gama e o tempo de acumulação no processo de contagem foi de 600 s. A resposta do cintilador à radiação de nêutrons de uma fonte radioativa de AmBe com intervalo de energia de 1 a 12 MeV foi estudada. A atividade da fonte AmBe foi de 1 Ci Am. A taxa de emissão foi de $2,2 \times 10^6$ nêutrons/segundo. A tensão de operação do tubo fotomultiplicador foi de 1300 V. O tempo de acumulação no processo de contagem foi de 600 s. Com os resultados obtidos, pode-se observar que os cristais são sensíveis a essas radiações.

PALAVRAS-CHAVE: Cintilador, crescimento de cristal, radiação gama, radiação de nêutrons.

1 | INTRODUCTION

The scintillation method is widely used for detection of various types of ionizing radiation. A scintillator consists of material able to convert energy of absorber ionizing radiation into a flash light. The flash light, usually visible or ultraviolet, emitted by a scintillator, is called scintillation. Any scintillator should be transparent to the wavelength of its own emission. The use of scintillation to detect radiation is a century old. The discovery of scintillator materials may be divided into three periods. The first period included the earliest scintillators: $CaWO_4$, first used in the year following Rontgen's discovery for X-rays; uranyl salts used by Becquerel to discover radioactivity and by Rutherford to study alpha particle scattering. The second period began with Hofstadter's development of the thallium activated NaI. The third period, the past two decades, has witnessed a veritable renaissance in research and development of scintillator materials, prompted in large part by the need for scintillators for precision calorimetry in high energy physics and for high light output scintillators for medical imaging, geophysical exploration, tomography, astrophysics and numerous other scientific and industrial applications. [7,16]

There is still considerable interest in finding inorganic materials with perfect scintillation properties or improving the traditional scintillators, including alkali halides. In order to enhance the characteristics of a known scintillator or to obtain a new crystal, it is necessary to solve many problems, such as crystalline structure, chemical binding or impurity concentration, which is more advantageous for high light output of a crystal. [17]

Scintillators based on cesium iodide are the leading ones among the materials

available for radiation detectors. Cesium iodide based scintillators have high luminescence yield accompanied by high energy resolution and radiation stability. Cesium iodide has elements of ionic radius, namely: the cesium ion (Cs^+) radius is 1.652 Å, electronegativity 0.7 eV and the iodine ion (I^-) radius is 2.256 Å; electronegativity 2.5 eV the equilibrium value lattice separation is 4.512 Å. This facilitates the incorporation of a large number of cationic impurities. Various impurities have been included into alkali halides and their effects on electrical, magnetic and optical properties have been investigated.

The CsI matrix is poorly hygroscopic, its constituents have a high atomic number, are easy to handle and have relatively low cost.[15] Babin et al. [2] mention the interest in CsI:Pb crystals as possible materials for scintillators, since their luminescence is practically not studied. Some data reported by different authors are quite contradictory. This indicates a complexity of this system and a strong dependence on the optical characteristics of the crystals that may be related to the method used for growth. According to Keszthelyi et al. [6], the scintillation characteristics of the crystals are also influenced by the growth method used.

Divalent lead ions Pb^{2+} in some crystal structures are efficient emission centers and their application in scintillators was and is still the reason of an intensive study of emission properties of different compounds containing these ions. The study of pure and doped cesium iodide has been the theme of search in our laboratory. In continuation, a systematic investigation has been carried out in Pb^{2+} doped cesium iodide crystals under gamma and neutron excitations and the results are discussed in this paper.

2 | MATERIALS AND METHODS

Lead doped CsI crystals were grown using the vertical Bridgman technique. [3,12,13,9,14] The grown crystals were subjected to annealing. In this procedure, vacuum of 10^{-6} mbar and constant temperature of 350° C, for 24 hours, were employed. The crystals were cut into cylindrical form and their faces were polished with ethylene glycol p.A. ($\text{C}_2\text{H}_6\text{O}_2$). The side surfaces were left unpolished to enhance internal reflection.

The luminescence decay time of each crystal was determined under excitation of 662 keV gamma rays from a ^{137}Cs source. The scintillation photons were detected using a bi-alkaline photomultiplier tube (model RCA 8575, 21 pins). The conformation of the signal from the photomultiplier tube was obtained using the RC (resistor-capacitor) circuit having a time constant of approximately 5 ns and fed directly to the oscilloscope (Philips PM3295A), resulting in the measurement of the decay of the scintillation pulses. In Fig. 1 the electronic system used for luminescence decay time measurements is schematically show.

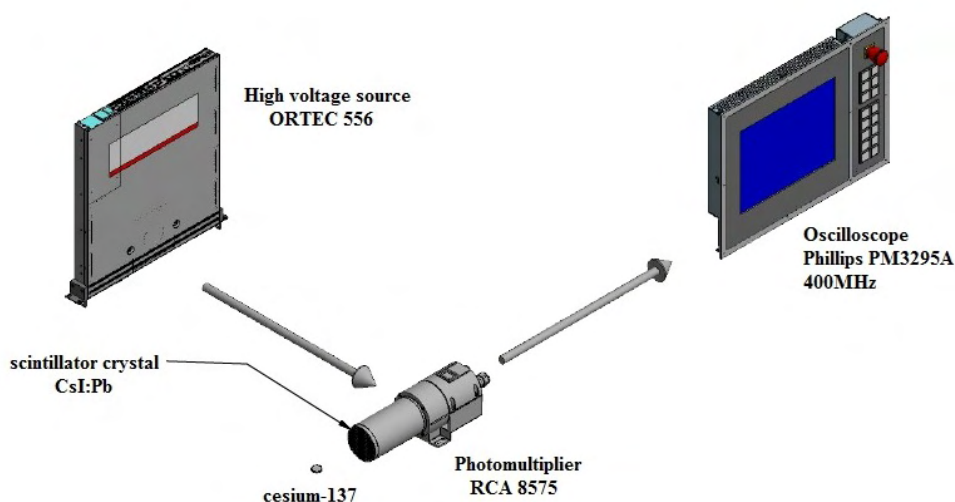


Figure 1: Diagram of the electronic system used for luminescence decay time measurements.

In the gamma ray response study, the crystals were cut with dimensions of 20 mm diameter and 20 mm high, polished and coupled directly to the bi-alkaline photomultiplier tube (model RCA 8575, 21-pin) using silicone grease (Dow Corning) of 0.5 McStokes viscosity as optical interface. This ensures a uniform refractive index across the contact surface between crystal and photomultiplier tube. The sides of the crystal which were not in contact with the photosensor were covered with several layers of polytetrafluoroethylene (PTFE) tape to assure good reflection of light.

The radioactive sources were positioned in the center of the upper face of the crystal. Conventional ORTEC electronic modules constitute the electronics for the treatment of the signals from the photomultiplier tube. Gamma radiation sources with energies in the range of 335 keV to 1333 keV were used. The operating voltage of the photomultiplier was 2700 V and the accumulation time in the counting process was 600 s. In Fig. 2, the diagram of the measuring system is showed.

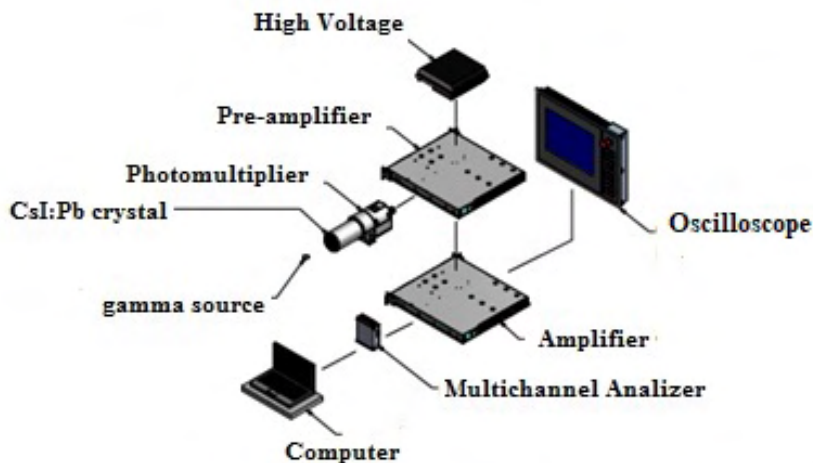


Figure 2: Schematic representation of the electronics associated with the CsI:Pb scintillator crystal coupled to the photomultiplier tube.

The AmBe source with energy range of 1 to 12 MeV was used to study the neutron radiation response. The activity of the AmBe source was 1Ci Am. The emission rate was 2.6×10^6 neutrons/second. The operating voltage of the photomultiplier tube was 1700 V; the accumulation time in the counting process was 1800 s. The scintillator used was cut with dimensions of 20 mm diameter and 10 mm high.

The detection efficiency of the scintillator crystal was measured with the AmBe source positioned at a distance of 100 mm from the photomultiplier tube. A foil of cadmium (Cd) was placed around the detector and the photomultiplier tube in order to avoid the scattered neutron contribution, as showed in Fig.3. Paraffin shielding to protect the worker, was used.

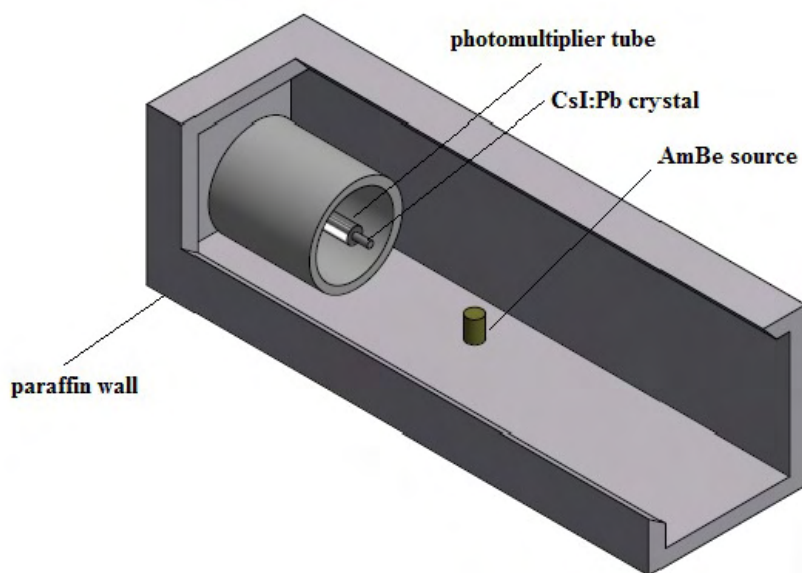


Figure 3: Exploded schematic representation of the array used for measurements.

3 | RESULTS AND DISCUSSION

In Fig. 5, the luminescence decay curves of the CsI:Pb crystals are presented. For comparison purposes, the luminescence decay constant was determined for the pure CsI crystal, as shown in Fig. 4.

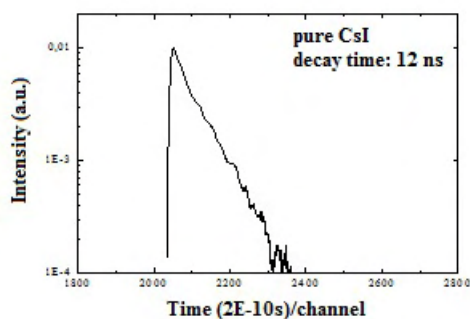


Figure 4: Luminescence decay time spectrum of pure CsI crystal.

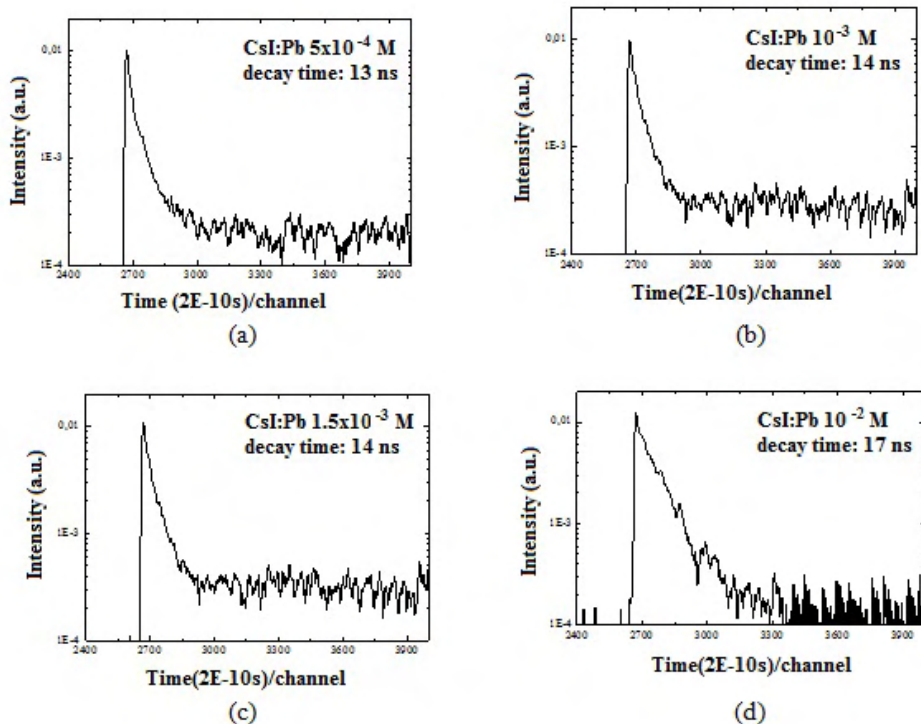


Figure 5: Luminescence decay time spectra of CsI:Pb crystals at various concentrations: (a) 5×10^{-4} M, (b) 10^{-3} M, (c) $1,5 \times 10^{-3}$ M and (d) 10^{-2} M.

Fig. 5 and Fig.4 show the luminescence decay curves for the CsI:Pb and pure CsI crystals. As it may be observed in these curves, there were no significant differences for the various concentrations of lead in the crystals evaluated. The incorporation of the Pb into the CsI matrix, did not, practically, change the luminescence decay time compared to that obtained for pure CsI, whose values are between 13 ns and 17 ns. These results are very promising, i. g. to obtain crystals having shorter decay time comparable to pure CsI scintillator crystal. The crystal of pure CsI produced in this work, for comparison purposes showed a luminescence decay constant of 12 ns in accordance with the literature [5,1,10].

The luminescence decay time parameter is one aspect of crystal quality, especially for applications requiring high radiation rates or high energy radiations. The luminescence decay time results found in this work are encouraging since, with the introduction of dopant ions such as Tl^+ or Na^+ in the CsI matrix, it results in increased luminescence decay time for 1 s and 630 ns respectively. The CsI:Tl crystal is one of the most efficient scintillators in gamma ray detection per unit volume, but the long decay time, in the order of 1s, is one of its disadvantages, increasing the probability of occurrence of overlapping signals, when more intense radioactive sources are used. The decay time in the order of 1s, practically makes it unfeasible rapid temporal studies, such as those of the decay structure performed in nuclear

physics. The CsI:Na crystal presents good light production, but the luminescence decay time is still high for specific applications and its main disadvantage is the hygroscopy [7,16].

Fig. 6 to 9 show the gamma radiation spectroscopy results of ^{137}Cs (662 keV), ^{60}Co (1173 keV and 1333 keV), ^{22}Na (511 keV and 1275 keV) and ^{133}Ba (355 keV) obtained with the CsI:Pb crystals. It may be observed that the crystals are sensitive to these radiations; however, the photopeak of these radionuclides have not been identified.

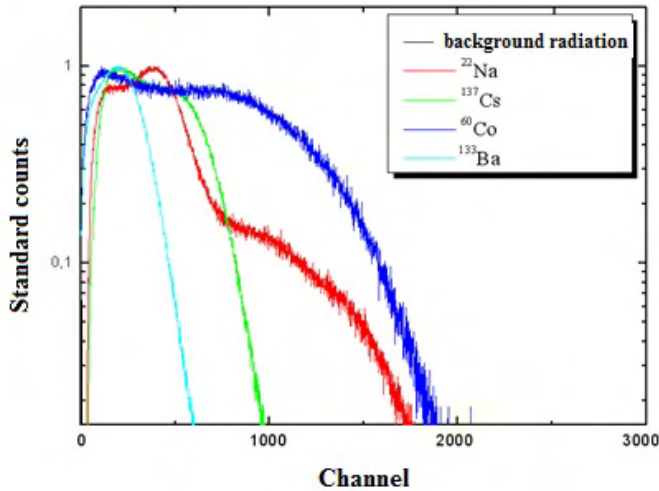


Figure 6: Spectra obtained for the radiation of ^{137}Cs , ^{60}Co , ^{22}Na and ^{133}Ba sources with CsI:Pb $5 \times 10^{-4}\text{M}$ crystal.

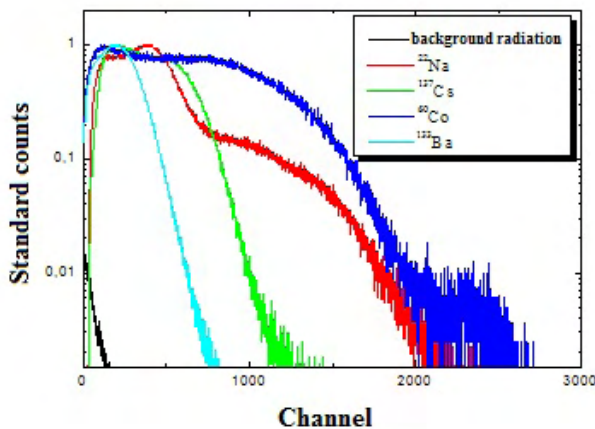


Figure 7: Spectra obtained for the radiation of ^{137}Cs , ^{60}Co , ^{22}Na and ^{133}Ba sources with CsI:Pb 10^{-3}M crystal.

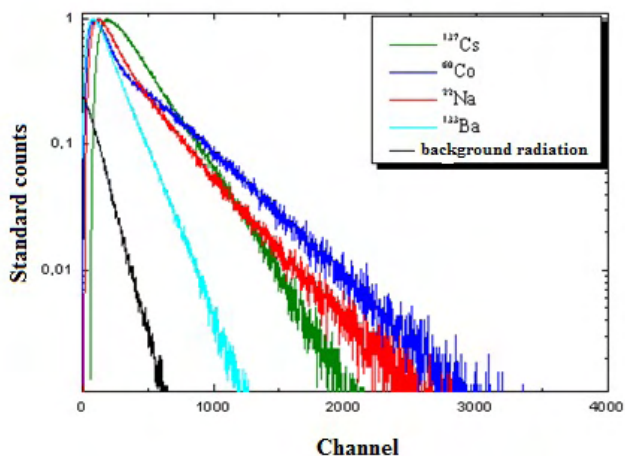


Figure 8: Spectra obtained for the radiation of ^{137}Cs , ^{60}Co , ^{22}Na and ^{133}Ba sources with Csl:Pb $1.5 \times 10^{-3}\text{M}$ crystal.

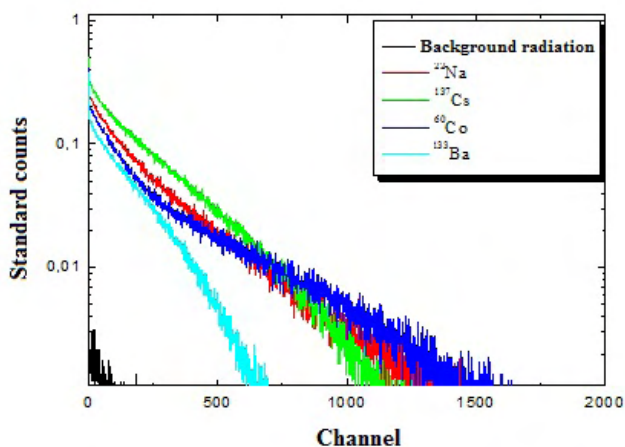


Figure 9: Spectra obtained for the radiation of ^{137}Cs , ^{60}Co , ^{22}Na and ^{133}Ba sources with Csl:Pb 10^{-2}M crystal.

From the curves obtained for the Csl:Pb crystals, using gamma radiation from the sources of ^{137}Cs , ^{60}Co , ^{22}Na and ^{133}Ba (Figs. 6-9) it was not possible to extract the resolution of these detectors. The low resolution capacity of the crystals of Csl:Pb may be attributed to the self-absorption of the luminescence in the crystals themselves, due to the presence of Pb in their structures. However, for applications where the energy resolution is not a relevant item, the Csl:Pb crystals may be used when a radiation detector with good mechanical resistance, relatively low cost of production and different sizes and geometries is desired.

In electromagnetic calorimeters, the need for large-scale high-energy particle detectors has led to international collaboration to develop, optimize and produce scintillators

for this purpose. The Compact Muon Solenoid (CMS) experiment in the Large Hadron Collider (LHC) accelerator at CERN uses approximately 80,000 PbWO_4 (lead tungstate) crystals, totalling approximately 100 tonnes [11]. Another project, ALICE, also in the accelerator (LHC) will use 18,000 PbWO_4 crystals, about 13 tons [4]. The crystal scintillator PbWO_4 presents light output of 250 photons / MeV and decay time of 5 to 15 ns [4,8].

Fig. 10 shows of measurements performed using the CsI:Pb crystals with concentrations 10^{-2} M, 10^{-3} M and 5×10^{-4} M and the neutron source.

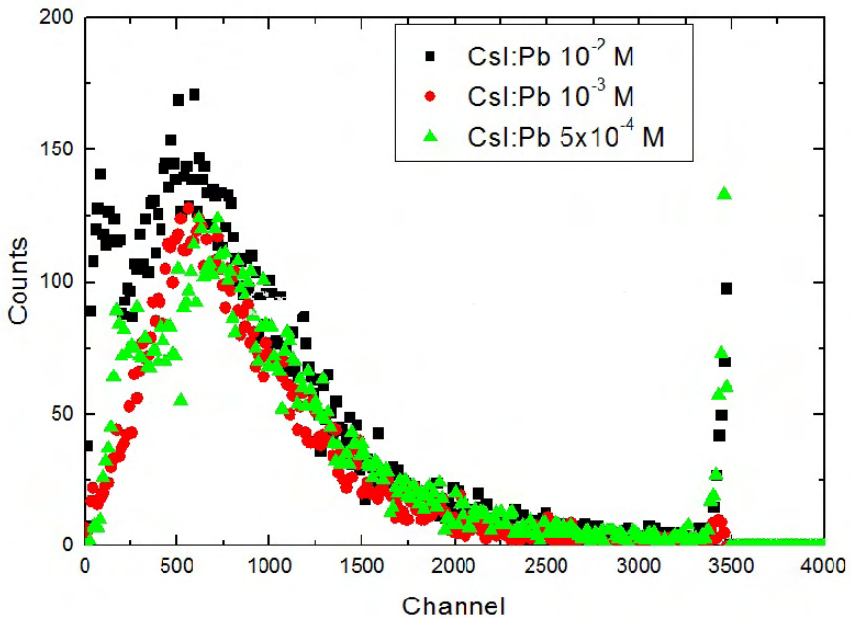


Figure 10: Results of the measurements using CsI:Pb crystal and neutron source.

CsI:Pb crystals, when excited with radioactive source of AmBe with energy range of 1 to 12 MeV, showed sensitivity to fast neutron, and the highest counting efficiency was obtained in the concentration of 10^{-2} M.

4 | CONCLUSION

The CsI: Pb crystals presented short decay time values, demonstrating the viability of their use for measurements of high dose and high energy rates. These results have shown to be very promising to obtain crystals having short decay time, when compared to the pure CsI scintillator crystal.

The crystals of CsI:Pb showed sensitivity to gamma radiation detecting the energies

of the radioactive sources used, although it was not possible to identify the corresponding photopeak.

The addition of the lead ions (Pb^{2+}) to the CsI matrix resulted in crystals with promising results, when excited with neutron radiation. The crystal showed to be sensitive to fast and thermal neutron.

In the dopant concentration range (Pb) studied, the best neutron detection efficiency was obtained for the molar fraction 10^{-2} .

The results showed the feasibility of using the crystals developed in this work for application in high energy physics. In our work environment, they may be applied as area of a neutron detector and used in the personal dosimeter for the workers of the IEA-R1 and IPEN/MB-01 nuclear research reactors.

REFERENCES

1. AMSLER, C.; GROGLER, D.; FOFFRAIN, W.; LINDELOF, D.; MARCHESOTTI, M.; NIEDERBERGER, P.; PRUYS, H.; REGENFUS, C.; RIEDLER, P.; ROTONDI, A. **Temperature dependence of pure CsI: scintillation light yield and decay time**. Nucl Instrum Methods Phys Res., v.A480, p. 494-500, 2002.
2. BABIN, V.; KRASNIKOV, A.; NIKL, A.; NITSCH, K.; STOLOVITS, A.; Zazubovich, S. **Luminescence and relaxed excited state origin in CsI:Pb crystals**. Journal of Luminescence, v.101, p. 219-226, 2003.
3. BRIDGMAN, P. W. **Proc. Amer. Acad. Arts Sci.**, v. 60, p. 303-383, 1925.
4. CMELOCHER, C. L. **Perspectives on the future development of new scintillators**. Nucl Instrum Methods Phys Res, v.537, p. 6-14, 2005.
5. HAO, G.R.; HUI, Z.S.; CHUAN, Z.Z.; KAN, Z.; FAN, Y.; YING, L.H.; FENG, C.X. **Luminescence and decay time properties of pure CsI crystals**. Journal of Inorganic Materials, v.32 (2), p.169-174, 2017.
6. KESZTHELYI, L.S.; FOLDVÁRI, I.; VOSKA, R.; FODOR, Z.; SERES, Z. **Decay time measurements on pure CsI scintillators prepared by different methods**. Nucl Instrum Methods Phys Res, v.A303, p. 374-380, 1991.
7. KNOLL, G. F. **Radiation Detection and Measurement**, 4th ed. New York, NY, USA: John Wiley & Sons, 2010.
8. KOBAYASHI, M.; USUKI, Y.; ISHII, M.; ITOH, M.; KIKL, M. **Further study on different dopings into PbWO_4 single crystals to increase the scintillation light yield**. Nucl Instrum Methods Phys Res, v.540, p.381-394, 2005.
9. MARGULIES, M.; WITOMSKI, P.; DUFFAR, T. **Optimization of the Bridgman crystal growth process**. Journal of Crystal Growth, v.266, p. 175-181, 2004.

10. MIKHAILIK, V. B.; KAPUSTYANYK, V.; TSYBULSKYI, V.; RUDYK, V.; KRAUS, H. **Luminescence and scintillation properties of CsI: A potential cryogenic scintillator**. Phys Status Solidi B, v.252, n°4, p. 804-810, 2015.
11. Novoyiny, R. **Inorganic scintillators-a basic material for instrumentation in physics**, Nucl. Instrum. Methods Phys. Res. v.A537, pp.1-5, 2005.
12. PEREIRA, M.C.C.; FILHO, T.M. **Scintillation Characteristics of CsI Crystal Doped Br under Gamma and Alpha Particles Excitation**. Materials Sciences and Applications, v. 05, p. 368-377, 2014.
13. PEREIRA, M.C.C.; FILHO, T.M.; HAMADA, M.M. **The effect of Pb²⁺ dopant in the crystal of CsI and its application as scintillation detector: a study of alpha particles**. Radiation Effects and Defects in Solids, v. 167, p. 921-928, 2012.
14. RAVI, B.; RAJARAJAN, G. **Study on growth and optical, scintillation properties of thallium doped cesium iodide scintillator crystal**, Oriental Journal of Chemistry, v. 30, p. 581-586, 2014.
15. SELVASEKARAPANDIAN, S.; BRAHMANANDHAN, G.M.; MALATHI, J.; JOSEPH, V. **Thermoluminescence and photoluminescence studies on gamma irradiated CsI:Pb²⁺ crystals**. Radiation Effects & Defects in Solids, v.161, n°9, p. 559-570, 2006.
16. TSOULFANIDIS, N. **Measurement and Detection of Radiation**, New York, N.Y.: Harper & Row, 1983.
17. ZAZUBOVICH, S. **Physics of halide scintillators**. Radiation Measurements, v. 33, p. 699-704, 2001.